

Datasheet

Chain Conveyor



4545 BOYCE PARKWAY STOW, OHIO 44224

INFO@ANDERSONFEEDTECH.COM

☎ +1 216-641-1112

www.andersonfeedtech.com



ANDERSON™
FEED TECHNOLOGY
powered by Ottevanger

General


Anderson Feed Technology Chain conveyors are sturdy enough to convey the most difficult bulk materials. The chain conveyors are available in capacities up to 14125 ft³/h. These conveyors are exceptionally suitable for conveying over long distances.

Features

- S235 steel trough, fully enclosed design
- Primer and paint finish
- Geared drive units
- Flexible coupling
- HPME wear plate
- Guide strips (C45)
- Overflow valve
- Chain tensioner

Special Executions

- Executed in AISI304
- Executed in galvanized S235 steel
- All-weather features like drive unit housing and shaped covers
- Speed sensor
- ATEX22 zoned drive units
- Intermediate outlets
- Recirculation head with intermediate bottom
- Inlet flow regulation slide
- Protective chain hood for intake applications
- Spotfilter

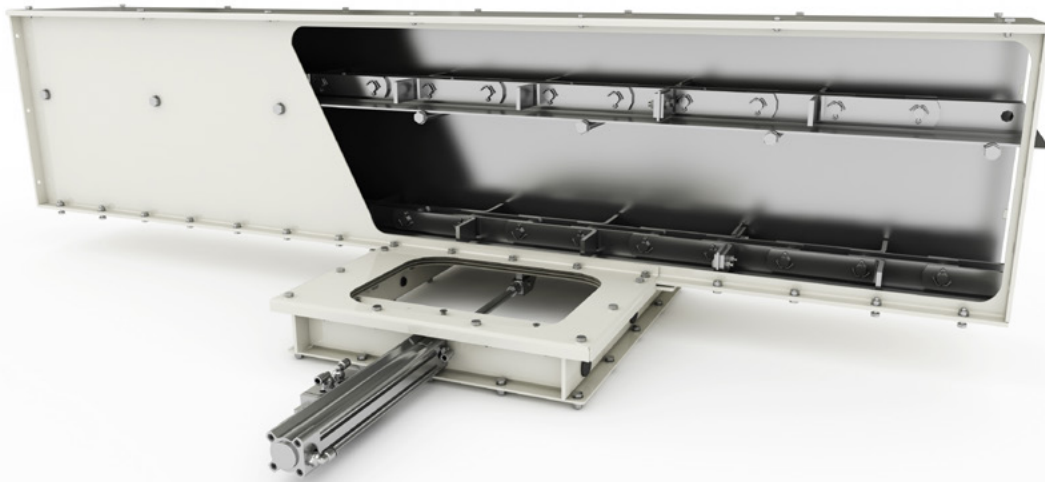

Capacity (ft³/h)

Type	0,3 (ft/s)	0,4 (ft/s)	0,5 (ft/s)	0,6 (ft/s)	Chain width (inch)	Pitch circle (inch)
220 x 430	1660	2225	2755	3320	8	10
320 x 430	2473	3320	3320	4980	12	10
420 x 430	3320	4450	5545	6675	16	10
420 x 580	5651	7523	9994	11301	16	16
420 x 580	7063	9394	11700	14126	20	16